

Trango XL³

Owner's Manual and Service Booklet

Serial Number: _____

The data and statements contained within this manual may be changed without prior notice. No part of these documents may be copied or transmitted for any purpose in any manner or by any means, either electronic or mechanical, without explicit written permission from UP International.

© 1995-2015 UP International



Version 1.0
Effective: 03/2015
Updated: 03/2015

Table of contents

WELCOME IN OUR TEAM.....	5
SAFETY INSTRUCTIONS	6
CORRECT BEHAVIOUR IN RELATION TO THE ENVIRONMENT	6
DEVELOPMENT OF PARAGLIDERS.....	7
TECHNICAL DESCRIPTION.....	7
PURPOSE.....	8
LTF AND EN CLASSIFICATION	8
TARGET GROUP AND RECOMMENDED FLYING EXPERIENCE	8
NECESSARY SKILLS FOR NORMAL FLIGHTS.....	8
NECESSARY SKILLS FOR DEALING WITH DISTURBANCES	8
SKILLS FOR DEALING WITH RAPID DESCENT METHODS.....	8
SUITABILITY FOR TRAINING.....	8
BIPLACE AND PPG.....	8
RECOMMENDED TAKEOFF WEIGHT	9
TECHNICAL DATA UP TRANGO XC³.....	10
CONSTRUCTION	11
<i>Aerofoil Stabilising System²</i>	11
<i>Performance data</i>	11
CANOPY MATERIAL.....	11
LINE MATERIAL	12
LINE SYSTEM	12
RISERS.....	12
UP BACKPACK.....	15
<i>Adjustment of the back pack</i>	16
<i>Packing tips</i>	16
BEFORE THE FIRST FLIGHT	16
ADJUSTMENTS	17
<i>Position of the brakes</i>	17
<i>Speed system</i>	19
SUITABLE HARNESSSES	19
RESCUE SYSTEM	20
USE OF THE UP TRANGO XC ³	20
AEROBATICS.....	20
MOTORISED PARAGLIDING.....	20

FLIGHT PRACTICE AND SAFETY	20
FLIGHT PRACTICE	20
PRE-FLIGHT CHECK	20
THE START PHASES	21
SPEED CONTROL	22
<i>Using the brakes</i>	22
<i>Using the Speed System</i>	22
TURNING	22
LANDING	23
WINCH TOWING	23
<i>Attaching the towline release system</i>	23
FLIGHT SAFETY	24
THERMALS AND TURBULENCE.....	24
GETTING DOWN FAST	25
<i>Steep Spiral Dive</i>	25
<i>B-Line Stalls</i>	25
<i>Big Ears</i>	26
FLYING OUTSIDE THE NORMAL FLIGHT ENVELOPE.....	26
BEHAVIOUR IN EXTREME SITUATIONS	26
COLLAPSING THE PARAGLIDER	27
<i>Asymmetric collapse</i>	27
<i>Cravatte</i>	27
<i>Full frontal collapse</i>	27
THE STALLS	27
<i>Deep Stall</i>	28
<i>Full stall</i>	28
<i>Spin</i>	29
WINGOVERS	29
EMERGENCY STEERING	29
FURTHER REFERENCES	29
<i>Rain-induced deep stall</i>	29
<i>Adhesive logos</i>	30
<i>Overloading</i>	30
<i>Salt water</i>	30
MAINTENANCE AND CLEANING	30
TAKING CARE OF YOUR PARAGLIDER	30
<i>Paraglider fabric</i>	32
<i>Paraglider lines</i>	32
<i>Storage and transport</i>	33
CLEANING	33
REPLACING ASS BATTENS	33
CHECKS AND REPAIRS	34

MAINTENANCE	34
<i>Airworthiness Check</i>	34
<i>UP Craftmanship</i>	35
UP WARRANTY	35
<i>National warranty conditions</i>	35
<i>International UP warranty</i>	35
CHECKING THE UP TRANGO XC ³	36
PACKING AND CHECKING OF THE RESCUE SYSTEM	36
SENDING THE UP GLIDER AND OTHER UP PRODUCTS	36
DISPOSAL	36
UP HOMEPAGE	37
SOME FINAL WORDS	37
ATTACHMENTS	38
LINE PLAN	38
LINELENGTHS	39
SERVICE BOOKLET	47
PRODUCT REGISTRATION CARD	51

Important

The following symbols are used to draw attention to particular sections:



WARNING!

Failing to comply with instructions given here may lead to injury or death!



BEWARE!

Failing to comply with instructions given here may cause undue wear to, or even damage your new wing.



NOTICE

This pictogram indicates a tip or some helpful extra knowledge.

Welcome in our team

Congratulations on the purchase of your new UP Trango XC³. UP International is renowned across the globe for designing and building the finest paragliders available – paragliders characterised by maximum safety, performance and quality in every aspect.

Please take a little time to complete and send the reply card found in the back of this manual. This way we can keep you informed of all new products and developments at UP, as well as any technical information about the UP Trango XC³.

We would also be delighted to hear any feedback you have concerning the glider. This is only possible once we have received your product registration, either through completing and sending the attached product registration card, or by doing the same online via www.up-paragliders.com>service>product registration. Your completed product registration is also needed should any warranty issues arise.

If you have any questions regarding your paraglider or auxiliary equipment please ask your local dealer or feel free to contact us here at UP directly.

Have fun with your new UP Trango XC³

UP International Team

Safety instructions



Paragliding is an extremely demanding sport requiring the highest levels of attention, judgement, maturity, and self-discipline. Due to the inherent risks in flying this or any paraglider, no warranty of any kind can be made against accidents, injury, equipment failure, and/or death. This glider is not covered by product liability insurance. Do not fly it unless you are personally willing to assume all risks inherent in the sport of paragliding and all responsibility for any property damage, injury, or death, which may result from use of this paraglider.

Please read this owner's manual thoroughly before your first flight with the UP Trango XC³ so that you are fully acquainted with your new glider. This manual gives you information on the entire specific and general flying characteristics of the UP Trango XC³, but it does not replace attending a paragliding school. It is important to note the following points:

- at the time of delivery the UP Trango XC³ conforms to LTF NFL II-91/09 and EN 926-2:2013 requirements (see certification information later in this manual),
- any changes being made outside the permitted range of adjustment invalidate any and all claims under the warranty,
- using this paraglider is exclusively at the risk of the user; the manufacturer or distributor assumes no responsibility for accidents occurring while using it,

- it is assumed that the pilot is in possession of the necessary qualifications and provisions of any relevant laws are observed,
- when reselling the wing please make sure you also give this manual to the new owner. The manual is an integrated part of the paraglider and is required for the wing to keep its certification.

Correct behaviour in relation to the environment

Paragliding is a particularly nature-friendly sport. This makes it all the more important that we as paraglider pilots behave in a responsible way towards both the environment and the people sharing it with us. We encourage you to treat nature with respect, to stay on marked hiking trails when walking to takeoff or hiking out from an XC landing, to avoid unnecessary noise, to never litter and to observe all local regulations.

Please also make sure to comply with legislation regarding protected areas, privately owned property or hunting arenas – this ensures the least possible friction in relation to other users of the great outdoors, to the benefit of both yourself and the sport as a whole.

Development of paragliders

Admitted; we're proud of our history. No other company in the free flying world can look back on such an expansive history as we can. The UP story started back in 1970 when Pete Brock graduated from the Art Center, a world famous school for design and engineering in Pasadena, California, and promptly created some of the most legendary race cars ever – the Daytona Coupe from General Motors was one – and then went on to become fascinated by the emerging sport of hang gliding – at that time probably the maddest pastime of them all. After founding Ultralite Products he introduces his first wing, the Dragonfly, and soon the new company becomes known under the UP acronym...

Pete Brock's spirit survives to this day in everything we do at UP International – we still have our very own way of seeing things and designing things. This entails building paragliders that are not only as safe as they come, they must also meet the very high standards we set ourselves. Among these are the continued use of the most advanced technology available both in the designing and manufacturing process, but also the feel, the handling and the performance of the finished product. All this because we're addicted to building wings that will fascinate you. A good paraglider is comprised of a number of interacting factors of which looks, feel, handling and performance are but a few. Only when all these come together in the final product can we claim to have built a wing that is homogeneous and pleasurable to fly; and only then we're happy, and ready to introduce our new UP baby to the free flying world.

Our gliders are developed using state-of-the-art CAD software. Our programs allow us to do the initial flight testing in a virtual environment where we can simulate a great many things before even assembling the first prototypes.

Once we're happy with the new prototype's behaviour in the virtual environment, the program generates the templates after which the glider is sewn. When a new prototype arrives from our proto-building experts everyone at UP is excited about the prospects of trying it out in real life. The practical tests may show that further modifications are needed – these may be carried out on the existing wing, or a new prototype is built with the mods already incorporated. In exceptional cases this may continue through several prototypes, for only when we're 100% satisfied do we submit our new wing to homologation testing with the testing houses. We owe it to our customers, and to our own history, to be particular about which products earn the UP badge.

Technical description

The UP Trango XC³ was built to fulfil the expectations to a modern, safe and fast entry-level wing. The launching is excellent and the performance figures impressive.

As with all UP products, the materials used have been carefully chosen for their outstanding quality and strength, to guarantee a long and trouble-free service life.

Further construction details, including line lengths, are included in the certification specification sheets, which form part of this manual. Any technical changes will appear in the appendix.

Purpose

According to LTF 91/09 the Trango XC³ is an air sport vehicle (class paraglider) with an empty weight of less than 120 kg.

LTF and EN classification

The UP Trango XC³ is certified to the following classification(s): LTF09/EN C

Target group and recommended flying experience

Performance pilots with extensive experience flying no less than 75h/year in a variety of conditions. Perfect for the performance oriented XC pilot.

Necessary skills for normal flights

Wings in this class are characterised by their demanding behaviour in case of inflight disturbances. Short brake travel, dynamic reactions and little dampening along all 3 axis' require a great deal of feeling and experience from the pilot. Intensive training of the control techniques as well as profound knowledge of the appreciation and prevention of unintended wing configurations are a must for pilots flying this class of wing.

Necessary skills for dealing with disturbances

Paragliders in this class require correct, timely and adequate pilot reactions to canopy disturbances. Pilots flying these wings should be current and should fly often enough that their reactions do not grow rusty. If the necessary skills are not there we recommend a good SIV course with the UP Trango XC² to get familiar with the wing.

Skills for dealing with rapid descent methods

The behaviour during manoeuvres like spiral dives or B-line stalls in this class can be demanding. The pilot should possess adequate skills for the safe execution of these rapid descent manoeuvres. In case of insufficient skills or experience in this department we strongly recommend partaking in an SIV course with the new wing.

Suitability for training

We do **NOT** consider the UP Trango XC³ suited for initial training.

Biplace and PPG

The UP Trango XC³ is for solo pilot use only. There is no connection possibility for more than one harness. The UP Trango XC³ is not build for powered paragliding (PPG). There are no trimmers on the risers.

Recommended Takeoff weight

The UP Trango XC³ is manufactured in four sizes. Each size is optimised for the middle of the weight range, but can be flown anywhere within the weight range. In order to help you find the ideal size for your weight we have compiled the following practical tips:

If your total takeoff weight is within the middle 1/3 of a size's weight range then this is the size for you. In this range you will have the ideal compromise between dynamic handling and docile behaviour. We recommend this wing loading especially for pilots mainly flying in flatland regions.

Pilots finding themselves in the middle, between two sizes need to approach the process somewhat differently. Experienced pilots will generally know how they prefer to fly, i.e. if they like to be heavy on their wing or rather would have a little buffer upwards, and will choose their size accordingly.

Pilots with less experience are likely to prefer the somewhat damped reactions obtained from flying at lower wing loadings – this speaks for choosing the larger of the relevant sizes.

And finally, pilots preferring more dynamic rides will want to load their wings up well, and will be choosing a smaller size.

Technical Data UP Trango XC³

Size	S	SM	M	L
Surface area flat [m ²]	21,7	23,1	25,1	27,1
Surface area projected [m ²]	18,5	19,7	21,4	23,1
Flat span [m]	12,3	12,7	13,2	13,7
Projected span [m]	9,8	10,2	10,6	11,0
Flat aspect ratio	6,9	6,9	6,9	6,9
Projected aspect ratio	5,3	5,3	5,3	5,3
Number of Chambers	68			
Total line length incl. Brake [m]	232	239	249	259
Total # of lines incl.Brake	198			
Glider weight [kg]	4,6	4,9	5,1	5,4
Takeoff weight [kg]	63-85	78-100	92-115	105-130
maximum symmetrical steering travel at maximum weight [cm]	65	65	65	65
	12	12	14	14
Accelerator travel [cm]				
Number of risers (split A-risers)	3+1	3+1	3+1	3+1
Trimmer	no	no	no	no
LTF/EN Category	C	C	C	C
Description	Performance Competition			

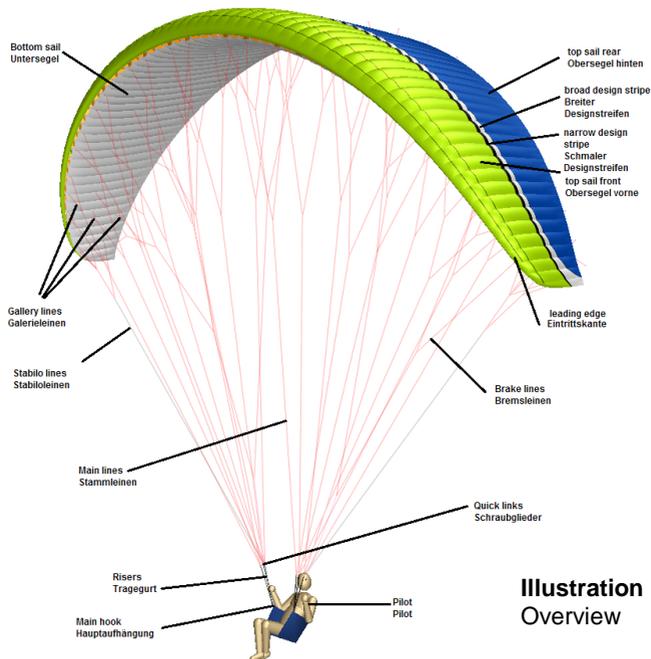


Illustration 1:
Overview

Construction

The UP Trango XC³ is the ideal wing for pilots that desire the ability of a high-end performance wing combined with the safety of an intermediate wing. We achieve the optimal combination of performance and safety by implementing our completely overworked profile (NGA – new generation airfoil) with several innovative detailed solutions

Passive safety by

- Different Angle of Attack over the wing span
- NGA provides perfect internal pressure at all angles of attack
- High arc design - very manageable handling and safety


High performance by

- High A/R
- Unsheeted lines
- Long battens

Aerofoil Stabilising System²

UP was first with the Aerofoil Stabilising System, an idea that has since been widely accepted in the industry. The Trango XC³ uses a modified version of the same, and we have chosen to call this the ASS². Instead of Mylar® the ASS² comprises a Nylon® batten that defines the leading edge curvature and helps keeping the cell opening open at all times. This Nylon® batten is insusceptible to bending damage and has no ageing properties – it will normally outlast the rest of the canopy by a good margin. This means that the UP Trango XC³ will retain its perfect launching characteristics all through its service life. In the unlikely event that a batten should break it can be replaced in a few easy steps – please

refer to the chapter “Replacing ASS battens” for guidelines.

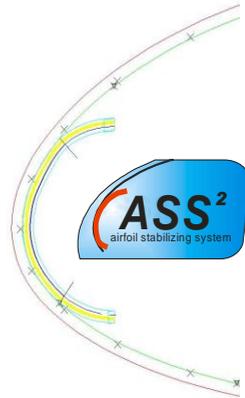

Performance data

Main focus area during the development phase of the Trango XC³ was the improvement of the key performance figures in comparison to the predecessor. We wanted a wing with higher trim speed and better L/D at all speeds, and through the use of advanced software we could begin to compare on the virtual 3D models right from the outset of the drawing process. Combining different software allowed us to draw a wing that at least in the virtual world was significantly better, and the real-life refinement and testing showed that the computer models were right.

Canopy material

The UP Trango XC³ is sewn from polyamide cloth, which is particularly stretch-resistant and durable, and is specially treated for maximum UV-resistance.

At UP we are always testing new materials to see if our wings can benefit from new developments in the textile industry. After comprehensive tests we have settled on the following Porcher Marine material mix for the Trango XC³

- Top sail front + design stripes: 9017 E25 "Skytex 38 Universal" (38 g/m²)
- Top sail rear/ Bottom sail: 70000 E71 „Skytex 27“ (27 g/m²)
- Ribs and V-Tapes: 9017 E29A (40 g/m²)

This mix comprises the best compromise between weight/bulk and longevity.

Line material

The lines used on the UP Trango XC³ are unsheathed Dyneema® and Aramid lines made by Edeldid, Cousin and Liros. Diameters from 0,5 mm to 1,5 mm are employed (brake lines sheeted).

A new manufacturing process in which the lines are pre-stretched makes these lines particularly stretch-resistant, and they have little or no tendency to shrink. Their break-load is noticeably higher than that of comparable Aramid lines, and they are completely unsusceptible to bending-cycle damage, unlike Aramid lines.

Line system

The entire line system is formed from individual lines, which are sewn and looped at both ends. The single line levels are connected over a special hoop technology (the "handshake" loop) to prevent a weakening of the core and a loss of strength. The lines and stitching are subject to rigorous production controls, to ensure high and consistent manufacturing quality.

The lines of each wing section consist of four groups and the brake lines:

A-Level: AI, AII, AIII
B-Level: BI, BII, BIII, STI
C-Level: CI, CII, CIII
Brake lines : BRKI

The brake lines are collected at one main control line per side. This control line runs through a pulley attached to the D-Riser and is marked with a black dot at the point where it should be tied to the brake handle swivel. The brake is pre-set so that the glider is at 0 degree brake when the toggle is free. Please don't change the main brake lines without checking the new length carefully at a suitable training hill before flying!

The line bundles (A, B, C and D) are colour coded for easy identification and handling. All main lines of each level are looped together and attached to delta quick links, which are connected to the risers. The quick links have special line collectors to prevent lines slipping.

Risers

The split A risers and B risers are colour marked to improve ground handling and B-lining/Big Ears.

A Risers: Red
A3 Risers (for Big Ears): Green
B Risers: Blue
C Risers: Black

In order to accommodate different pilot sizes the Trango XC³ risers are length-adapted to the canopy size – S and SM has shorter risers than M and L. This little detail improves the

ergonomics of the wing and makes all the different manoeuvres (b-line stalls, BigEars) more accessible to every size of pilots, from the smallest to the tallest.

The speed system is optimised along the same lines.


We use a very similar riser design for our competition wings. They allow for very high top speeds with low sink values and give impressive stability at high speeds.

Once activated the speed system pulls simultaneously on the A's and B's. This maintains the angle of incidence around the leading edge and causes only minimal influence to the collapse resistance properties of the wing.

Top speed is reached when the top pulley touches the bottom pulley of the speed system, down near the karabiner.

The plastic ball (tie ball, see Illustration 21) on the accelerator allows the accelerator to change from 2- times transmission to 1-time transmission. When you start to push the accelerator, in the beginning only half power is necessary to activate the accelerator. When the plastic ball reaches the bottom pulley, this pulley is blocked and the necessary travel of the accelerator is cut in half. This mechanism lightens to push the accelerator with angled legs (please refer to the harness and accelerator section in this manual)

There are no more adjustable, displaceable or variable devices.

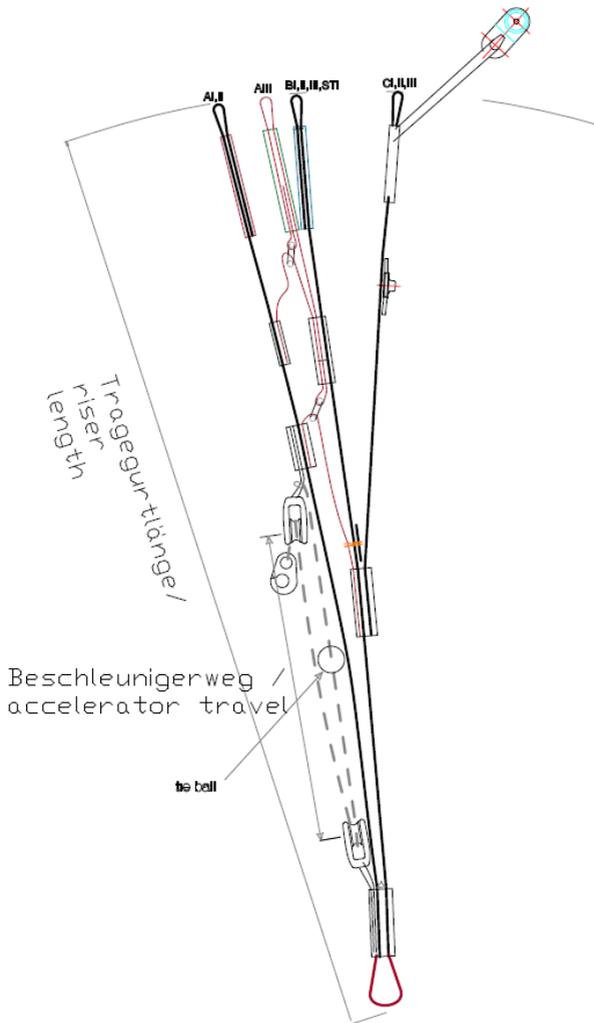

Riser length [mm]	S, SM	S, SM accelerated	M, L	M, L accelerated
A I, II	500	360	540	375
A III	500	400	540	420
B I, II, III, STI	500	425	540	450
C I, II, III	500	500	540	540
Accelerator travel (pulley on pulley)	-	115	-	140

Illustration 2: UP Trango XC³ riser

UP Backpack

The UP Trango XC³ is delivered with a special paraglider backpack, which fulfils the demands of very high luggage volume and ergonomically optimised comfort.

We have built in an anatomical carrying system that allows an optimised load distribution for maximum comfort. The S-shaped shoulder straps allow full adjustment and the detachable chest strap prevents the shoulder straps from slipping

The load control straps attached to the shoulder straps can be set either loose, to aid ventilation, or tight, for extra stability. They should rise from your collarbone at about a 45° angle.

A hip belt is also incorporated to assist overall comfort. If the hip belt is tightened then the shoulder straps can be released slightly to transfer the load away from the shoulders. The hip belt is fitted with stabilisation straps, which can be tightened to help stability, or loosened for extra freedom of

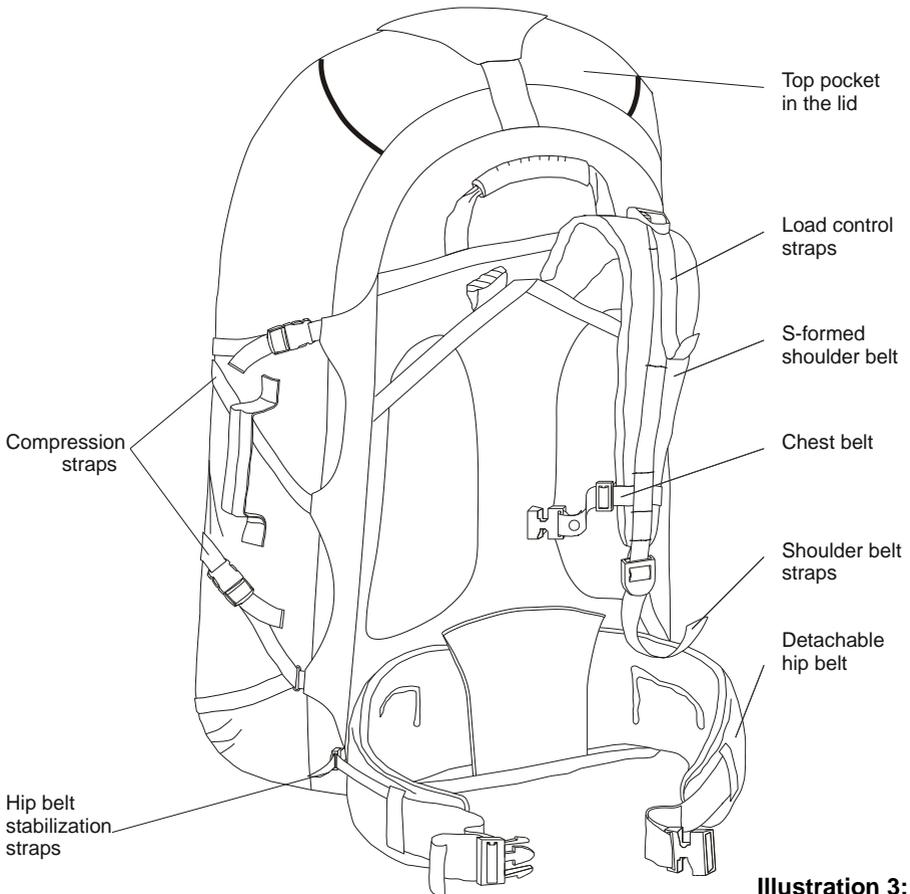


Illustration 3:
UP back pack

off the shoulders.

movement. The hip belt is removable for

when packing size is critical, or the pack is being transported by air.

It is important, especially when there is a long trek involved, that the backpack is adjusted for maximum comfort. The following advice should be considered when packing.

Adjustment of the back pack

When fully loaded, all compression straps should be tightened to secure the load in the pack. All carrying straps should be set fully loose and the pack then put on your back. The hip belt should be fastened and tightened to rest approximately in the middle of the hip. Any slack should be taken out of the shoulder straps, and the chest strap should be done up. The load control straps at the shoulders and hips can now be tightened to achieve the desired stability.

Packing tips

Packing the UP paraglider rucksack correctly will make it a pleasure to carry. A couple of easy tips can help you get it right. Failing to follow these tips will adversely affect your carrying comfort.

The centre of gravity of the load should be as close to the vertical centre axis of the carrier, while also being situated as high on the back as possible. This allows for a vertical posture and minimises the leverage of the load against the natural posture of the carrier. It also helps by reducing the oscillations of the load while walking.

The drawing shows the ideal load distribution in the UP rucksack. Loaded like this the carrying comfort will be optimal. Start by placing the heaviest items close to the shoulder blades, with lighter items over and under this region.

The lightest items should be placed the furthest from your back.

Do not fasten any objects to the exterior of the rucksack, as these are unprotected against theft and can also get caught on protruding points when entering or exiting lifts, cars or buses.

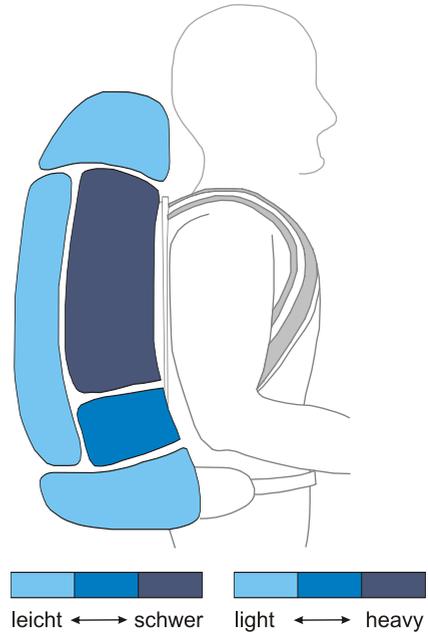


Illustration 4: Ideal load distribution in the UP rucksack

Before the first flight

The UP Trango XC³ is delivered with a rucksack, parasleeve, repair materials and this manual. The manual may also be downloaded from the UP website. Every Trango XC³ delivered has been

minutely checked at the factory, and corresponds exactly to the wing certified by the DHV.



ATTENTION! The Trango XC³ must be test-inflated on flat ground, and the first flight must be carried out by a professional, before the wing is delivered to its new owner.

Adjustments

The UP Trango XC³ has undergone an extensive development program and series of flight tests to ensure that the production model exhibits the optimum characteristics with regard to safety, handling and flight performance.

As with all products from UP International, the UP Trango XC³ is manufactured to the highest quality and precision. The line lengths of each glider are individually checked and recorded before dispatch.

Under no circumstances should the lengths of the lines or risers of the UP Trango XC³ be altered in any way.



WARNING! Any change to the configuration of the wing will invalidate certification!

The only change allowed is to the length of the lower brake line. This should only be done by an experienced person.

Position of the brakes

The UP Trango XC³ is delivered from the factory with what we feel is the best brake position for most pilots. But tall or short pilots, or those with a harness with non-standard attachment points might consider it necessary to change the position of the brake handles.

If the brakes are to be shortened, it is extremely important to avoid the adjustment affecting the glider's trim speed. There must always be some slack in the brakes when they are fully released. This can be checked with the glider inflated above the pilot's head. There should be a noticeable bow in the brake lines, and the brakes should be having no effect on the shape of the trailing edge.

If the brake lines are to be lengthened, it is important to ensure that the pilot can still stall the canopy (i.e. during extreme manoeuvres or landing) without the need to take wraps.

If you do feel the need to change the brake line lengths, do so a little (3-4 cm) at a time, and preferably whilst at an easy training slope. Check especially that both lines are the same length, as any asymmetry will lead to tiring and possible dangerous flying characteristics.

If you have any questions or concerns with reference to the brake line lengths then seek advice from either your UP dealer or directly from UP International. To tie the brake line onto the brake handle use the following simple fisherman's knot, as shown in illustration 5. This knot guarantees the least amount of line weakening.



BEWARE! Loose or incorrect brake knots can cause serious accidents through loss of the steering of the glider!

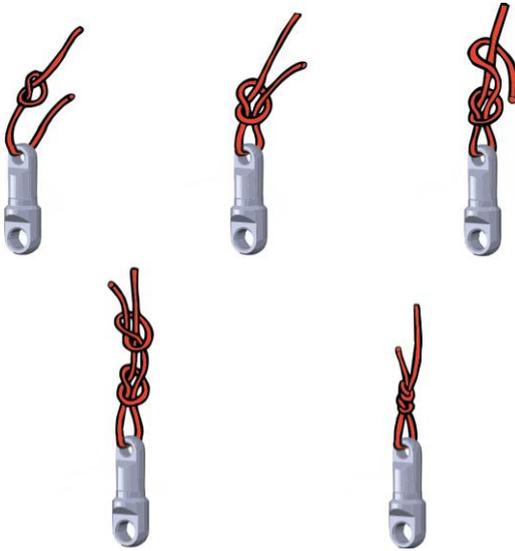


Illustration 5
Fishermans knot

Speed system

It is important that the speed system is connected correctly, and the length checked, to ensure smooth operation in flight.

The link between the foot stirrup and the risers consists of two cords and two Brummel® hooks. The speed stirrup itself is composed of a foot bar and webbing with loops sewn on either end to attach the cords. These cords should be run up through the eyelets and pulleys on the harness to connect with the pulley system on the front of the risers (see illustration). This illustration refers to the UP harness, but most harnesses are similar. If in any doubt, please ask your school or the harness dealer/manufacturer.

The length of the cords should be set so that, at full leg extension, the pulleys on the risers are just touching each other. Any shorter and the stirrup will be difficult to reach; longer and the top of the speed

range will be unavailable.

During take off it is advisable to fix the accelerator stirrup underneath the harness to avoid any danger of tripping over it.

Suitable harnesses

The Trango XC³ can be flown with any harness with the main suspension point at around chest height. The lower the suspension points the more the harness will respond to weight shift.

The recommended distance between the karabiners depends on the pilot weight:

<50kg: 38cm

50-80kg: 42cm

>80kg: 46cm

The harness design should also guarantee that it is possible to accelerate the UP Trango XC³ up to

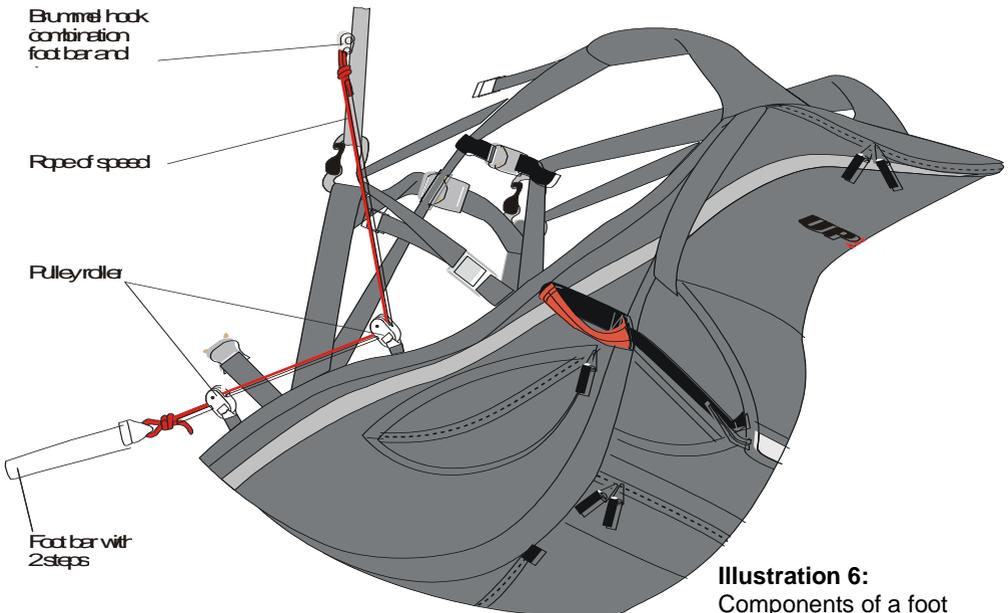


Illustration 6:
Components of a foot accelerator

the maximum speed.

Please note that different harnesses can cause very different wing characteristics in extreme situations (like increased risk of twists with cocoon harnesses).

Note that the height of the hang point also affects the brake line length. If you have a question about your UP harness, contact your dealer or UP International.

Rescue system

It is strongly recommended that you have a rescue system (reserve parachute) fitted at all times. In some countries it is mandatory, so check if you plan to travel. Make sure that the reserve system you have is the correct size, and that you are fully conversant with its use.

For fitting the reserve system, follow the instructions of the harness manufacturer.

Use of the UP Trango XC³

The UP Trango XC³ has been developed and tested solely for foot launched and winch launched paragliding flights. It is not allowed and potentially dangerous to use the glider for any other purpose.

Aerobatics

The UP Trango XC³ has not been developed, constructed and/or tested for aerobatics use.



WARNING! The glider has not been certified for aerobatics. Performing aerobatics with the UP Trango XC³ or any other paraglider can be very dangerous. Doing aerobatics can induce flying configurations well beyond the tested flight envelope, and can lead to total loss of

control. Aerobatics can also overload your glider and break it in flight.

Motorised Paragliding

The UP Trango XC³ has not been tested for use with any kind of engine.

If you wish to fly your UP Trango XC³ with a motor please get in touch with the manufacturer of the engine unit, with UP International GmbH and with the governing body for ultralight flying in your area, to check on certification of this configuration.

Flight practice and safety

Both of the following chapters (Flight practise and Flight safety) describe fundamental aspects of flying paragliders. In no way do they substitute proper training, nor should any of the content therein be unknown to any pilot who has chosen to fly a paraglider like the UP Trango XC³.

Flight practice

Pre-flight check

Make sure whenever you get your UP Trango XC³ back from somebody else to check the glider very carefully if you are not the only pilot flying it. Ask if there was anything that could have damaged any part of the glider, if the pilot has found any part that needs to be replaced or if they noticed any strange flight behaviour. Make sure you do the same when you lend your glider to somebody else.



A thorough pre-flight inspection should be performed prior to each flight. A careful pre-flight check is a must for any and all airplanes – also the UP Trango XC³. Please apply the same care and attention before EVERY flight!

Before every launch you should carry out the standard 5-point checking procedure. It is a good idea to do the checks following the same sequence every time to minimize the risk of omitting something.

1. Unpack and arrange your glider in a semi-circular manner. This shape ensures that the centre cells inflate before the tips. When unfolding your glider, observe the wind direction and arrange your glider so that it is pointed directly into the wind.
2. The lines must be arranged so that there are no tangles and the A-lines are uppermost. Once the lines are free and untangled, check to make sure that they all go directly from the riser to the glider without going over the top of the wing. Launching with a line over the wing is extremely dangerous! It is also important that the brake lines are free and not tangled.
3. Next check that you have put the harness on correctly, and ensure that both leg straps and the chest strap are closed and adjusted. Also check the rescue system pins and deployment handle.
4. Right before the launch you should check the air space (also behind you).
5. Once again check the wind direction before take-off.

The start phases

The take-off characteristics of the UP Trango XC³ are extremely straightforward. Only a gentle forward pressure on the A risers is necessary and the glider will inflate evenly and climb above your head. The glider has no tendency to hang back behind you or to overshoot over your head.

With the A risers and the brakes in your hands, have another look at your unfolded glider. By stronger wind the start can be facilitated if the UPTrango XC³ is inflated solely with both the internal A-risers (front A-riser). Make sure that you are centrally positioned in the middle of the wing, and that the wing is facing into wind. The middle of the canopy is marked by the UP logo at the leading edge.

Inflate the glider with a steady run and remember to position your arms so that they are a continuation of the A risers. As the glider comes above your head, you should glance up to see that the entire canopy is inflated and flying. The UPTrango XC³ has a low surge tendency, so there is usually no necessity to brake to stop the glider from over-flying you.

Directional control should only be attempted when the glider is above your head. Excessive braking will cause the wing to drop back.

Only after checking that the wing is properly inflated do you apply slight brake pressure and accelerate rapidly down the hill. After a few steps you will reach flying speed and become airborne.



NOTE: The decision to actually take off or not is only really taken towards the end of the control phase. The pilot accelerates

the start run and is airborne. Depending on the inclination of the launch paddock it may make sense to brake a bit in this phase. Once airborne and at a safe altitude the pilot slips into the seated position in the harness – WITHOUT RELEASING THE BRAKE HANDLES. If this is not possible then the pilot may hold both handles in one hand whilst assisting the seating with the other.

Speed control

Using the brakes

The UP Trango XC³ has a wide useable speed range, coupled with excellent stability at all speeds. The speed can be set with the brakes to optimise performance in any situation.

Maximum glide speed is achieved with the brakes released completely, whereas minimum sink speed is with approximately 10-15 cm of brake applied. Further braking will not improve the sink rate, but the brake pressure increases noticeably as the glider reaches minimum speed.



BEWARE! Flying close to the stall point is very dangerous and should be avoided. At speeds below minimum sink the danger of entering an unintentional stall or spin is increased dramatically.

Using the Speed System

The UP Trango XC³ is equipped with a very efficient speed system, working over a foot stirrup as usual. By engaging the speed system the true air speed may be increased by around 11 to 13 km/h. Being familiar with the use of the speed system is an important skill to have in paragliding.

The speed system should be used when you are flying through sinking air, when

trying to achieve best glide in a headwind, or trying to cover the ground as quickly as possible. But it is important to remember that the glider will be more susceptible to collapses at high speeds, so the speed system should not be used in extreme turbulence. If a collapse occurs with the speed system applied then it should be released immediately. Some warning of an imminent collapse is afforded by the tension felt in the speed system; should the tension suddenly reduce then the stirrup should be released and the glider returned to normal trim speed.



BEWARE! All extreme flight situations, such as collapses, happen more dramatically at increased speed. Therefore the speed system should not be operated near the ground or in noticeable turbulence.

Turning

The UP Trango XC³ has been developed to meet the demands of intermediate pilots. The brakes have been designed so that the first 15 to 20 cm of travel will cause a soft and direct turning, whereas larger movements will give the glider an agile and nimble feel.

Brake input and amount of weight shift induced will define the radius and bank angle on the UP Trango XC³, and will allow it to be controlled with ease. Using weight shift in combination with brake input will result in flat turns with minimum height loss and is in fact always the most efficient control

method. The radius of the turn is then controlled with the brake line whereas the bank is controlled through weight shift.

If needed the UP Trango XC³ will turn very tight. To do this, apply some brake input on both sides, then release the outside brake whilst applying further brake on the inside – this will reduce turning radius to a minimum.

When brake input is increased beyond approximately 50% on one side, the UP Trango XC³ begins a fast and steep turn, which can be made into a steep spiral (refer to chapter heading "steep spiral").

Landing

The UP Trango XC³ is easy to land. While pointing into the wind, the pilot should fly the wing fast until approximately one meter above the ground, and then apply both brakes completely. When landing in stronger wind, less brake is required. Landing from steep turns should be avoided due to the risk of an uncontrolled pendulum reaction.

Winch towing

The UP Trango XC³ tows easily. There are no special techniques that need to be employed, but consideration should be given to the following points:

- Especially when you are towing at an unknown field, make sure that you are fully aware of any local conditions and peculiarities. Ask the local pilots if you are at all unsure.
- During the launch, ensure that the glider is completely inflated and over your head before giving the 'start towing' signal. If the glider is not central over your head do not continue with the tow. Any corrections attempted through the brakes during

this critical phase may result in the canopy deflating again, or in the tow progressing with a non-flying wing; if tow tension is applied when the glider is not correctly positioned then a 'lock out' or a stall could occur.

- Try to avoid large brake inputs until you are reasonably high. Emphasize weight shift if course correction is necessary close to the ground.
- Do not try to climb steeply during the first part of the tow. Good airspeed is essential.
- Do not use a towline tension greater than 90 daN at any time during the tow.
- All persons involved with the towing operation should be suitably qualified and experienced. All equipment used should, where necessary, be certified, and a tow permit should be valid for the field being used.

Attaching the towline release system

The optimal attachment point for the towing line release is always in the system's centre of gravity. On a paraglider that means the connection point between the risers and the harness, preferably right onto the lower end of the risers. UP International has developed special tow-release connectors for the UP Trango XC³ to ensure the optimal connection between the pilot and the towing line. For safety reasons we suggest that you always use these connectors when towing the UP Trango XC³.

When using towing line release systems incorporating distance-tubes

between the risers it is important to ensure that the risers are not pulled together by the system (use webbing loops designed for climbing to increase the length of your release system). It is also very important to fit a bungee to the system that will keep it from hitting you in the face in the event of a towing line failure



BEWARE! If you are using a front-mounted reserve system it is very important to verify the unhindered deployment before every flight. In case of doubt please only tow using a textile release system.



A safe and efficient way to get used to your new paraglider is by practising your ground handling skills. We suggest finding a suitable area, like a playing field, and with light to medium wind it is quite easy to practice inflating the glider and feel the reaction to brake input, b-line stall, collapses etc.

Before takeoff and whilst flying it is very important to anticipate any likely turbulence and fly accordingly. Look well ahead, and as well as looking for areas of likely lift, try and predict, and avoid, areas of sink and rough air. If you do find yourself in turbulence then look for the cause, and adjust your flight plan to avoid other similar places.

Flight safety

The development of high performance paragliders from square parachutes has meant vast improvements in speed, sink rate and handling. But, at the same time, it has also led to a requirement on behalf of the pilot for accurate, sensitive control and an acute anticipation of possible flying conditions. Any glider, whether beginner or competition class, may collapse in turbulent conditions and you must be able to react accordingly.

Today you have a wide choice between different gliders in the UP range. The main difference between the gliders is in the stability that each class offers. Beginner wings react to turbulence less dramatically and are more forgiving when compared to top performance gliders, which have more sensitive, but less forgiving handling. Making the correct decision when choosing a new glider is most important; you should critically examine your flying and your level of knowledge.

Thermals and Turbulence

In turbulent air, the UP Trango XC³ should be flown with a little brake to increase the angle of attack and provide greater stability. While flying in strong or broken thermals, it is important that you concentrate on keeping the wing centrally above your head. Do this by allowing the glider to fly faster while entering a thermal, and by dampening the surge of the canopy while exiting the thermal by braking gently.

Flying fast is useful for getting through sink or when flying into a headwind. The UP Trango XC³ possesses a high inherent stability due to its construction and design, however an active flying style in turbulence will help increase safety by preventing unnecessary collapses and deformation of the canopy.

Getting down fast

All rapid descent manoeuvres should be practised initially in smooth conditions with plenty of altitude before you need to use them 'for real'. It is important to distinguish between the three techniques, and to know the merits of each.



WARNING! All other manoeuvres, such as full stalls and spins, should be avoided as fast descent techniques. They are not very efficient, and incorrect recovery can have dangerous consequences (as with any paraglider)!

Steep Spiral Dive

A maximum sink rate of over 15 meters per second can be achieved in a steep spiral dive, but it is advisable to build up gradually to these sink rates when you first practise spiralling.

Getting the UP Trango XC³ into a spiral dive is very simple and has already been described in the chapter regarding turning. When entering the spiral it is essential to induce the turn gradually; if you apply the brake too quickly you may enter a spin. If this happens, release the brake immediately and let the glider recover before trying again. Keep a steady tension on the inside brake and observe the increased angle of bank and sink rate. A little brake on the outer wing will help stabilize the glider at a high sink rate.

To recover from a spiral, simply release the inside brake. Do this gradually to prevent an uncontrolled steep climb caused by the excess energy built up during the dive. Be prepared for the glider to climb a little and to damp out the subsequent dive. Be warned that steep spiral dives are equal to high G loading on both you and your glider!

WARNING! Spiral dives with high sink rates expose the pilot and material to very high centrifugal forces – incidents caused by pilots falling unconscious during spiral dives have been recorded. Approach this manoeuvre with caution. NEVER fly a spiral dive with Big Ears engaged – this could lead to a catastrophic material failure!

B-Line Stalls

To induce a B-line stall, start from normal, un-accelerated flight. Reach up and take hold of BI,II, III risers at the quick links, still with your hands in the brake handles, and pull down simultaneously by approximately 15 cm. The first few centimetres of travel will be quite hard, but as the glider settles into the stall so the effort becomes less.

The glider will drop back a little as it stalls, and then centralize over your head. With 15 cm or so of pull a sink rate of up to 9 meters per second can be achieved. With less pull you will get a decrease in sink rate. The risers should not be pulled beyond this point, as it may result in the canopy entering an unstable phase or going into a frontal rosette. Should you inadvertently have pulled too far down on the B-risers, simply release them a little again until the wing is again stable above you, showing the characteristic deep crease along the B-level and being fully stretched out spanwise.

To recover from a B-line stall, the risers should be released abruptly and simultaneously. Doing so will allow the wing to re-inflate completely and resume normal flight. It is not unusual for the canopy to dive in front of the pilot as the wing regains speed, angles of up to 30-45° are perfectly normal. In

this phase the pilot should NOT engage the brakes!

WARNING! Releasing the B-stall too slowly, or asymmetrically, can lead to dangerous situations. Always practise manoeuvres under professional guidance and over water!

Big Ears

To pull the ears in, reach up and get hold of the outermost A-line on both front risers and pull them down, simultaneously, by about 20 to 30 cm until the tips collapse. Keep these two lines in your hands, to prevent the wing re-inflating.

Once the wing is flying in the Big Ears configuration we recommend engaging the speed system to about 50% of the maximum travel (more if higher sink rates are desired). This reduces the angle of incidence and improves the safety of the manoeuvres.

We suggest keeping the brake toggles in your hands while inducing Big Ears. The glider will remain fully steer-able through weight shifting during the manoeuvre. The sink rates will be around 3 to 5 meters per second (depending on the number of centre cells still open and on the amount of speed bar employed) straight ahead. To end the Big Ears configuration, simply release the A risers and disengage the speed system, and the wing will return to level flight. Small collapses may be cleared with directional changes and/or little pumps through the brake lines. Note that we advise against performing extreme manoeuvres while flying in the Big Ears configuration.

Inducing large Big Ears on the UP Trango XC³ when flying near its lower weight limit requires great caution on the amount of brake input used, as it may deep stall in extreme cases. Should this happen use

the recovery technique described in the 'Deep Stall' section.

Flying outside the normal flight envelope

Behaviour in extreme situations

The UP Trango XC³ is designed to be very aerodynamically stable. However as with all paragliders extreme turbulence or piloting error may induce unwanted behaviour from the canopy. To ensure that you are able to handle these situations correctly we strongly recommend that you attend a safety-training (SIV) clinic, where you may learn to master your wing outside the normal flying envelope under professional guidance.

Safety training manoeuvres should only be practised in calm air with sufficient altitude, and under the instruction of qualified instructors. We would like to use this occasion to once again remind you to never fly without a reserve parachute!

The manoeuvres and possible flight configurations described in the following may occur following a conscious effort on the part of the pilot, through turbulence or through pilot input error. Any pilot flying in turbulent air or making piloting mistakes may end up experiencing these flight configurations and therefore find themselves in danger, particularly if they are not adequately trained to master them.



WARNING! Mistakes during the execution of the following manoeuvres may seriously compromise the safety of pilot.

Collapsing the paraglider

Asymmetric collapse

The UP Trango XC³ belongs to the new generation of paragliders that, as well as having very good performance, also exhibit a high degree of stability. Wing tip collapses can almost always be prevented through active flying.

Once an asymmetric collapse has occurred, the pilot aims to maintain flying direction through weight shift and careful application of brake input on the open side.

If the open side is braked too much it may stall, and the wing will enter a spin – this is the classical recipe for cascading events (see the spin chapter).

In rare instances a wingtip may catch in the lines during asymmetric collapses (see cravats here below).

Cravatte

Our test pilots have found absolutely NO tendency towards cravattling in all the test flights the Trango XC³ has been subjected to. But under extraordinary circumstances any paraglider may cravatte, and if this happens the pilot should know how to deal with the situation.

The first step is to STOP any rotation, or, if this is not possible, to slow down the rotation as much as possible – a cravatted wing that is left to its own devices may very quickly enter into a spiral dive of such vehemence that the pilot cannot stop the rotation any more. Once the rotation is

under control the pilot attempts to free the cravatte by pulling on the stabilo line, perhaps in combination with pumping action through the brake lines.



If neither of these approaches work then the experts may decide to try either a full stall or a brief spin on the cravatted side – please note that these measures should ONLY be practised during an SIV training over water.



WARNING! Should the pilot be unable to control the rotation it is normally best to deploy the reserve parachute immediately. Uncontrolled and cravatted spiral dives are among the most dangerous canopy configurations in paragliding

Full frontal collapse

A negative angle of attack occurring through turbulence or from simultaneously pulling down both A-risers results in a full frontal collapse of the leading edge of the canopy. The UP Trango XC³ will normally reinflate quickly on its own, but can be assisted through the application of a light double-sided symmetrical brake input.

The stalls

When a paraglider flies through the air a laminar and a turbulent airflow forms around the surface of the wing. When the laminar airflow along the top surface is interrupted, dangerous flight configurations follow – we say that the wing stalls. This is most often the

consequence of attempting to fly with too high angle of attack.

In more detail we differ between three different forms of stall.

BEWARE! Spin and full stall are both dangerous and somewhat unpredictable manoeuvres. Do not stall or spin your paraglider on purpose. However it is very important to learn how to recognize the symptoms of a glider about to stall or spin so that you can take correct action to avoid it happening.

Deep Stall

The UP Trango XC³ has no inherent tendency towards deep stall. It will recover from a deep stall brought about by over-braking, by pulling on the rear risers, or by releasing the B-risers too slowly after a B-stall, on its own without any pilot input as soon as the brakes or the risers are released.

Should you however find yourself in a deep stall (as described above, this could happen through flying too light on the wing and pulling big ears) the situation can be rectified by simultaneously pushing both A-risers forward until the glider resumes normal flight. Avoid applying brake to one side if you think that you are in a deep stall as this could lead to a spin.

Always remember that practising manoeuvres where you fly close to minimum airspeed must only be carried out under professional supervision and with plenty of altitude.

Full stall

Wilfully induced full stalls remains the realm of the true experts of our sport.

The full stall is when there is no more laminar airflow along the surface of the canopy, and the wing has gone from being

a wing to being just a bunch of material at the end of some lines.

Once the airspeed has been reduced to below the minimum speed for the canopy the wing will stall. To the pilot it feels like dropping backwards, not unlike the sensation felt when a jester removes your chair from under you when you sit down. In this phase it is important to avoid releasing the brakes again, as this may lead to uncontrollable shooting forward of the canopy. In extreme cases pilots have fallen into the canopy through poorly timed full stall releases.

In the next phase the canopy stabilises somewhat above the pilot again. The wing tips will often tend to try to re-inflate quite violently, and it requires considerable force to maintain the wing in the stalled configuration.

It is important to stabilise the wing above the pilots' head before releasing the brake lines. The pilot accomplishes this by slowly releasing the brakes until the wing is all but re-inflated across the entire span. In this phase the wing will be moving somewhat along the cross axis. The pilot attempts to release the last bit of brake input as the wing is surged forward – this will cause the wing to resume flight with the least possible diving tendency. Pilots should note that timing the release wrongly may cause the wing to dive quite aggressively and be prepared to catch the dive.

Test pilots have also tested the asymmetric release of full stalls on the Trango XC³. This manoeuvre is **ONLY** for reference and should not be emulated by owners.



CAREFUL! The approach of the minimum speed is recognised through the

notable lack of forward speed and thereby wind noise and the extreme increase in brake line tension. Up until the wing starts to fall back the pilot may resume normal flight by simply releasing the brakes.

Spin

The negative spin occurs when one side of the wing is stalled while the other is still flying. This can happen when, if flying very slowly, one brake is pulled quickly to below the seat. When the glider starts to spin, it will turn quickly around the vertical axis, with the stalled side flying backwards. To recover from a spin, simply release the brake on the stalled side. The glider will immediately speed up and, most likely, suffer an asymmetric collapse. Recover as described above.

If you suspect that a spin is imminent then immediately release the inside brake. The glider will accelerate smoothly and resume normal flight with little altitude loss.

Wingovers

Wingovers are induced by flying alternating turns; each time letting the pendulum effect increase the bank angle.



BEWARE! The UP Trango XC³ is a agile glider, and it is quite easy to get to an excessively high angle of bank in just a few turns. Practice wingovers gently at first, as there is a chance of quite large collapses at high bank angles.

Also notice that a wingover flown with more than 135 degrees bank angle is classified as illegal aerobatics in some countries!

Emergency Steering

If for some reason the UP Trango XC³ cannot be controlled with the brakes, for example if the brake handle has come off the main brake line, it can be steered and landed with the rear risers. Be aware that, when rear riser steering, the glider is a great deal more responsive to pilot input, and the stall happens very suddenly.



CAREFUL: Do NOT use the accelerator during emergency steering!

Further references

Rain-induced deep stall

There are two reasons why flying with a wet wing increases the risk of deep stalling:

First reason: A paraglider flying in heavy rain will soon grow significantly heavier and thereby undergo changes in the centre of gravity and the angle of incidence. This may lead to deep stalls. Note that older wings will absorb more water than newer ones due to the coating on older wings being more permeable – this means that the critical mass may be reached sooner on older wings.

Second reason has to do with the actual rain drops on the top surface – if enough large rain drops form that the entire top surface is covered, but they don't join together to either flow off or become a homogeneous mass, the surface may become so rugged that the airflow separates and the wing stalls.

This phenomenon has been observed on hang-gliders and gliders for years

but only recently have we discovered that paragliders may also be affected. It is more likely to happen with new wings where the cloth is still highly hydrophobic and the drops thus do not penetrate but remain on the surface.

We know from computer simulations and practical tests that this is physically possible but we also suspect that it occurs very seldom in real life flying.

In both cases the brake line travel becomes very short and even small input may suddenly induce an airflow separation; in some cases even a gust or a sudden thermal may change the angle of incidence enough to cause the deep stall.

If you find yourself flying in unavoidable rain we strongly recommend that you avoid any sudden movements or radical brakeline input, that you do not pull Big Ears or B-stall, and that you steer clear of turbulence and avoid a deep flare on landing.



WARNING! Avoid flying in very humid air or in rain. A wet canopy may have very unpredictable flying characteristics, one of which is a radically increased risk of deep stall!

Adhesive logos

Always make sure that your intended logo will not in any way influence the glider behaviour. If in doubt we suggest avoiding the attachment of advertising logos on the wing. UP cannot be held responsible for any mishaps caused by intentional after-sales changes done to the wing.

NOTE! The use of heavy and/or unsuitable sticky material for logo work on the canopy may compromise the

certification and lead to the aircraft becoming unsafe to fly.

Overloading

The UP Trango XC³ is a very strong paraglider, and flying all the usual SIV and acro manoeuvres will not normally pose a structural problem. However, frequent acro training does accelerate the ageing process dramatically, and UP recommends having wings that are often used for acro or SIV-type manoeuvres subjected to checkups at shorter intervals than normally stipulated.

Salt water

If you do most of your flying near the sea, where the air is humid and salty, the wing may age faster. In this case we suggest you have it checked more often than prescribed in this manual.

Maintenance and cleaning

Taking care of your paraglider

The wear and tear that your paraglider suffers depends on a number of factors; how frequently it's flown, whereabouts in the world you fly it, how much UV it gets and how well you look after it. Bear in mind the following maintenance points:

Packing your wing

The Trango XC³ design uses ASS Nylon battens as reinforcements in the leading edge. This means that you can pack it "any" way you prefer, the

leading edges is insusceptible to packing damage. If you wish to take extra care of your Trango XC³ we recommend packing it in the UP ParaSleeve bag which is comprised in the delivery. The following is a step-by-step introduction to ParaSleeve packing, you may also find a short video showing it on the UP website, under Trango XC³.

ParaSleeve packing

Begin by placing the gathered wing on the ground next to the open ParaSleeve. Store the risers in the pocket on the inside of the ParaSleeve bag.



Sit on the opposite side of the bag and pull the cells onto the bag, one by one, from the nearest stable, across the middle and to the furthest stable.

All cell openings should be facing towards you, and the shape of each cell should be maintained so that the ASS battens are not bent.



Also note that the leading edge ideally isn't stacked all at the top of the bag; rather, the gathered cells are "stepped" (see illustration) so that the short wingtip ones are in the middle of the pack, and the longer centre cells are the only ones that reach the very top of the bag.



Close the bag onto the now completely gathered wing, and click the three buckles, then close the zipper.

Now your wing is in a neat but long package. Fold the trailing edge around 30cm in, and fold the leading edge on top of the fold, click the final buckles and you're done.



If you are storing your UP Trango XC³ for extended periods we recommend packing using the ParaSleeve method.

Also, on rugged/abrasive surfaces we suggest that you adapt the packing method to be able to leave the wing on the ParaSleeve all the way through, to avoid mechanical abrasion.

Paraglider fabric

We use a top grade polyamide cloth to build our paragliders, with a special protective coating against UV radiation and air permeability. The cloth will suffer if it is exposed to large amounts of UV (i.e. bright sunlight). Do not leave your glider lying in the sun for any longer than is absolutely necessary, only unpack and rig right before launching and do yourself the favour of repacking right after landing. Modern paraglider textiles have improved much in terms of UV durability but UV exposure remains the deciding factor of a paraglider's life expectancy. First the colours start to fade, then the coating and the structural integrity of the synthetic fibres begin to deteriorate.

On UP gliders the coated side of the cloth is facing inwards. This means that the coating is subjected to less mechanical abrasion while the porosity-limiting capabilities remain the same.

When choosing an area to lay out the glider before launching, try to find somewhere that is relatively free of stones and sharp rocks. Pay particular attention to the top surface, where the canopy touches the ground.

Never step on your glider – stepping on it will weaken the cloth, especially if the surface beneath it is hard or contains sharp objects. We recommend keeping an eye on spectators on launch. Many, especially children, do not fully appreciate

the fragility of the lines and cloth. It is usually easy to explain this to spectators and parents.

When folding your wing please make sure that there are no insects caught inside. Many insect species contain acids that could damage the cloth. Grasshoppers may use their sharp mandibles to attempt to gnaw their way out of a folded canopy, making it full of holes in the process. Besides they exude a dark and strong colourant that will stain the cloth if packed inside. Shoo them off before packing. Note that, contrary to popular belief, these particular insects are not attracted to any particular colours.

If the glider gets wet, then dry it as soon as possible, but not in direct sunlight! If you pack your wing away wet it may grow mildew and, if also subjected to heat, the fabric fibres may begin to decompose.

A new wing straight off the shelves is often compressed hard. The compression serves to reduce shipping costs but should not be repeated once the wing has been unpacked and flown for the first time. Also note that, in spite of it being a comfortable seat, the glider bag should not be used as such.

Should you accidentally put your UP Trango XC³ into seawater rinse it out thoroughly with fresh water and dry it slowly in the shade (see Chapter Cleaning).

Paraglider lines

The lines used on the UP Trango XC³ are high grade Aramid lines. Keep the following points in mind:

- The lines should be checked regularly for damage,

- Please take care to avoid abrasion and damage to the lines,
- The lines should not be knotted or bent unnecessarily,
- The main brake line at the handle should not have too many knots. Each knot weakens the line,
- After any line over-stressing (tree landings, water landings and other extreme situations) all lines must be checked for condition and length and should be replaced where necessary,
- If any change in flying characteristics is noticed then the lines should be checked and possibly exchanged. Immediately send your wing to UPInternational or to a UP certified checking facility if you feel that something is wrong!

Storage and transport

A paraglider should always be dry when packed, but this is particularly important after the last flight of the season. But even a completely dry wing should still be stored open in a dry, clean and dark place. If you do not have room for such winter storage we recommend you open all compression straps on the bag as much as possible and leave the bag lid off so that air can circulate around the packed canopy. Make sure no mice or cats make their sleeping quarters in your wing, and keep it well distant from solvents and acids. Petrol and other petrochemicals are especially abrasive for nylon and will dissolve the cloth if allowed near.

The storage temperature should be between 10 and 25 degrees Celsius, and the relative humidity between 50 and 75%.

Do not expose your UP Trango XC³ to extreme heat (storing it the boot of a car parked in the sun). The heat may cause moisture to be pressed through the fabric, thereby damaging the coating. High

temperatures in combination with moisture are a particularly volatile mix that will accelerate the hydrolysis process where the fibres and the coating are decomposed.

Cleaning

If you feel it necessary to clean your UP Trango XC³ at any time then use lots of lukewarm water and a soft sponge. More stubborn stains can be cleaned with a weak soap solution, and rinsed thoroughly. Then leave it to dry in a shady but well-ventilated area.



BEWARE! Never use chemical cleaning agents, brushes or hard sponges on the material, as these destroy the coating and affect the strength of the

cloth. The canopy will become porous and will lose structural strength. Never attempt to clean your paraglider in a washing machine. Even without using detergents the simple mechanical abrasion will quickly finish the canopy and render it useless. Also avoid dipping it in a swimming pool; the chlorine will damage the cloth. If you HAVE TO rinse the canopy, for example following a sea water landing, do so with a gentle spray of fresh water. Frequent spraying will accelerate the ageing process.

Replacing ASS battens

Due to the ASS reinforcement system the Trango XC³ leading edge is very robust. Should a reinforcement batten break they are however very easy to replace. A small pocket extension at the top end of the batten pocket allows

easy removal of the damaged batten; simply push the batten a bit further into the pocket extension and release the other end.



Use the damaged batten to measure a perfect new one from the extra batten material. The new ends should be sanded/filed round/ and covered with woven sticky tape before use. When inserting the new batten, make sure it is inserted all the way so it cannot accidentally come out.



Checks and repairs



Repairs and periodic checks should **ONLY** be carried out by UP, or by UP approved checking centres. Failure to comply with this will forfeit the certification. Consult: www.up-

paragliders.com under Service to find a check centre near you.

At UP we invest our entire knowhow in paragliding into making the sport safer for you. We offer a variety of services all centred around safety to our customers.

Maintenance

All care and maintenance must be carried out in accordance with UP recommendations. To ensure that this happens we strongly advise you to only let UP recognised service centres touch your wing – this is also a prerequisite for the UP warranty to be valid. So there's a lot speaking for letting UP, or a UP affiliate, look after your Trango XC³!

Airworthiness Check

In Germany and Austria all paragliders must be checked according to the following time schedule:

- 2 years after the first flight
- Every 2 years after that, or sooner if prescribed by the UP checking facility during the last check
- After 150 hours of flying
- After 100 flights

These limits have been set by the German Free Flight Federation (DHV) and make no less sense for wings flown outside of Germany/Austria. Contact your local dealer for information about the nearest UP approved checking facility.

We will happily service the glider more often, if you feel that it is necessary.



CAREFUL! If you notice new or unusual behaviour from your wing please hand it in for immediate inspection at a UP Service centre.

Please find the check procedure as separate document/file attached. Please have the service documented in the attachment of this manual (Service booklet).

UP Craftsmanship

In order to ensure that your UP Trango XC³ maintains its very high inherent performance and safety we highly recommend that you employ UP, or a UP affiliate, with any repairs or maintenance. Our service staff is trained and skilled, and knows the UP wings better than anyone.

UP Warranty

Conditions and extent of the UP International Warranty can be found in the following pages. For further information please ask UP International directly, or you local representative. The UP importer in your country is always delighted to clear any questions with you.

National warranty conditions

In some countries the local laws stipulate different warranty rules than those outlined here. Please note that these local rules only apply in the country where you have purchased your wing. Information about local rules and conditions are available from your local dealer.

International UP warranty

Warranty conditions:

The international UP warranty covers material- and workmanship faults and is valid for 24 months from the delivery date.

The UP warranty covers the cost of materials and workmanship on gliders accepted by UP to fall under the warranty. The UP warranty does not cover damage caused by accidents, or by changes made to the glider. Likewise, parts that are damaged due to normal wear and tear are exempt from warranty coverage. Fabric colour changes that do not influence the behaviour or safety of the wing are not covered by the warranty, and neither are faults caused by the exposure to solvents or salt water, or plain incorrect handling of the wing.

For any warranty claim to be accepted the following conditions must be adhered to:

- The paraglider was used under normal circumstances and was maintained according to the instructions given by UP International. Note that these include instruction for the correct packing, storing and cleaning.
- The paraglider was only used in accordance with its DHV certification.
- A complete logbook showing all flights, with duration and location, must be presented upon request.
- Only original UP spares have been used, and only UP, or a UP affiliate service centre, has performed repairs or service jobs on the paraglider.
- A complete, correct registration card has been filled in and sent to

UP within 14 days of the purchase. Note that you may also register your paraglider with UP via the UP homepage:

www.up-paragliders.com

>service >UP Product registration

UP reserves the right to refuse any claims not honouring one or several of these conditions. However, in some cases an "ex gratia" settlement may be offered.

Checking the UP Trango XC³

According to German and Austrian aeronautical legislation (§ 14 Abs. 5 LuftGerP) the owner of a glider can check the airworthiness by his own, or authorise a third person (for example manufacturer/importer) to do this.

To perform your own airworthiness check, UP International must give you a briefing. This briefing could be done after an agreement with UP International and is only valid for the UP Trango XC³. The owner gets the so-called "Nachprüfanweisung" after completing a successful checking at UP International.

Should the owner decide to check the wing by himself, or employ a 3rd party to do so, they must make sure that UP's guidelines are adhered to. Failing to do so will void the certification.

DHV and UP International highly recommend that you let the manufacturer/importer or a DHV accepted service company do the check of airworthiness.

Packing and checking of the rescue system

Only by regularly having your rescue parachute repacked can you guarantee its

flawless operation! As with the glider, the rescue parachute should be examined every 2 years by either the manufacturer or an authorised Service Centre. We offer a certified service for re-packing, checking and installing the parachute into your harness. We will also carry out any repairs necessary, all fully guaranteed.

Sending the UP glider and other UP products

The best way to send your paraglider, rescue parachute, harness etc. to our service team is in a stable box via post or UPS. Enclose a note of what requires doing (2 Year Check, repair, repack etc.) and also your daytime contact details. We will return your equipment either by post or UPS. Please indicate preferred method of payment (either bank cheque or Cod).

Should you require any further information about the services we offer, please contact us at the address and phone number below. We are also able to give you information about your nearest Authorised Service Centre, as well as other manufacturers who are authorised to check and repair UP gliders and equipment.

UP International GmbH
-Abteilung Service-
Kreuzeckbahnstraße 7
D-82467 Garmisch-Partenkirchen
GERMANY

Email: service@up-europe.com
Telefon: +49 (0) 88 21-7 30 99-0
Fax: +49 (0) 88 51-92 92 60-16

Disposal

Even the best products have a limited service life, and once the end is at

hand they must be disposed of properly. Please make sure you follow your finished paraglider all the way to a correct disposal, or send it back to UP International for correct disposal.

UP Homepage

The UP Homepage gives you information about the latest news and products from UP. You will find any technical information and accessories for your UP Trango XC³, as well as many useful things that are necessary for flying.

Beside paragliders, harnesses and flying equipment you will also find the new "Skywear" collection with the latest flying garments and the "News" section, which will keep you updated with all activities around UP.

www.up-paragliders.com

Some final words

With paragliding a fundamental new air sport has emerged; one that makes independent flight possible for almost everybody. The technical simplicity, the mobility of the wing and the ease of learning the basic flight techniques have all combined to make paragliding appear simple and straightforward.

As long as you fly with the necessary respect for the demands and dangers, then these ideals of paragliding will be fulfilled. You should decide for yourself whether conditions are suitable before you proceed with the flight. You should always be aware that any kind of air sport is potentially dangerous if you overstep the natural and physical laws, whether from ignorance or unreasonableness.

"Probably there are only a few sports where success requires, besides physical fitness, understanding the processes in nature to such a high degree - a fact which distinguishes paragliding as sport especially."* The charm of flying lies in "understanding the processes in nature", because you have to try again and again to fathom the logic and fly with regard to the decisions you make.

If you want to realise the dream of flying, the dream of free movement in the air, fly not to impress others - fly for the sheer joy of it.

We at UP wish you delightful, beautiful and accident free flying with your UP Trango XC³!

SEE YOU UP IN THE SKY –
UPInternational

* from Helmut Reichmann from the book "Streckensegelflug"

Linlengths

Glider Type: XG57 Trango XC 3 L (LTF/EN C)										Serial No.:																				
Rev. No.: 4										Date: 12.03.2015																				
Line lengths [mm]																														
R. Area	A										B										C									
No.	Left					Right					Left					Right					Left					Right				
	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm		
3	7518										7418											7533								
5	7430										7330												7442							
8	7387										7287												7397							
10	7425										7329												7438							
14	7292										7200												7307							
16	7208										7122												7227							
19	7142										7065												7162							
21	7172										7103												7205							
24	6965										6935												7009							
26	6866										6849												6918							
28	6792										6792												6852							
29	6793										6794												6854							
32	6573										6567												6615							
33	6523																						6615							
34	6525																						6585							

Total line length in cm from riser quick link to canopy including line loops, following DHV measuring method. Line load is 5 daN.

Rib numbering starts in the center of the wing. Wing sides in flight direction, seen from top.

Measurements are rounded to the next 0,5 cm. Please mark measurements relative to nominal by crossing X

R. Area	D										Brake										rib no. brakes	Loops on Quick link			Loop Index				
No.	Left					Right					Left					Right						Factory setting							
	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	-20 mm	-10 mm	0 mm	+10 mm	+20 mm							
3											8009												3-4	A1	-	0			
5											7737													6-7	A2	-	0		
8											7601													9-10	A3	-	0		
10											7627													12-13	B1	-	0		
14											7443													16-17	B2	-	0		
16											7310													18-19	B3	-	0		
19											7200													21-22	C1	Round turn	1		
21											7245													23-24	C2	Round turn	1		
24											7110													26-27	C3	Round turn	1		
26											7080													28-29	STI	Round turn	1		
28											7122													31					
29											7302													33-34					
32																													
33																													
34																													

brakes measured inkl. 10cm-loop

Single Line Lengths

Glider Type: XG57 Trango XC 3 L (LTF/EN C)

Serial No.:

Rev. No.: 4

Date: 12.03.2015

Line no.	Quantity	Length [mm]	material	colour
a1	2	862	8000U-090	Red
a2	2	774	8000U-070	Red
a3	2	783	8000U-070	Red
a4	2	821	8000U-090	Red
a5	2	740	8000U-090	Red
a6	2	656	8000U-070	Red
a7	2	642	8000U-070	Red
a8	2	672	8000U-090	Red
a9	2	569	8000U-070	Red
a10	2	470	8000U-070	Red
a11	2	240	8000U-050	Red
a12	2	241	8000U-050	Red
a13	2	548	8000U-050	Red
a14	2	498	8000U-050	Red
a15	2	500	8000U-050	Red
b1	2	762	8000U-090	Red
b2	2	674	8000U-070	Red
b3	2	683	8000U-070	Red
b4	2	725	8000U-090	Red
b5	2	648	8000U-090	Red
b6	2	570	8000U-070	Red
b7	2	565	8000U-070	Red
b8	2	603	8000U-090	Red
b9	2	539	8000U-070	Red
b10	2	453	8000U-070	Red
b11	2	240	8000U-050	Red
b12	2	242	8000U-050	Red
b13	2	542	8000U-050	Red
c1	2	677	8000U-090	Red
c2	2	586	8000U-070	Red
c3	2	593	8000U-070	Red
c4	2	634	8000U-090	Red
c5	2	555	8000U-090	Red
c6	2	475	8000U-070	Red
c7	2	462	8000U-070	Red
c8	2	505	8000U-090	Red
c9	2	464	8000U-070	Red
c10	2	373	8000U-070	Red
c11	2	224	8000U-050	Red
c12	2	226	8000U-050	Red
c13	2	590	8000U-050	Red
c14	2	560	8000U-050	Red

Line no.	Quantity	Length [mm]	material	colour
A1	2	1664	8000U-130	Red
A2	2	1612	8000U-130	Red
A3	2	1560	8000U-130	Red
A4	2	1508	8000U-130	Red
A5	2	884	8000U-130	Red
A6	2	1040	8000U-070	Red
B1	2	1664	8000U-130	Red
B2	2	1612	8000U-130	Red
B3	2	1560	8000U-130	Red
B4	2	1508	8000U-130	Red
B5	2	884	8000U-130	Red
B6	2	1040	8000U-070	Red
C1	2	1664	8000U-130	Red
C2	2	1612	8000U-130	Red
C3	2	1560	8000U-130	Red
C4	2	1508	8000U-130	Red
C5	2	832	8000U-130	Red
C6	2	915	8000U-070	Red
Amain	2	4992	DC 200	Red
Amain2	2	4992	DC 200	Red
Amain3	2	5512	8000U-130	Red
Bmain	2	4992	DC 200	Red
Bmain2	2	4992	DC 200	Red
Bmain3	2	5512	8000U-130	Red
Cmain	2	5200	8000U-230	Red
Cmain2	2	5200	8000U-230	Red
Cmain3	2	5720	8000U-130	Red
ST1	2	676	8000U-070	Red
ST2	2	676	8000U-070	Red
STI	2	5356	8000U-090	Yellow

Brake no.	Quantity	Length [mm]	material	colour
br1	2	1019	8000U-050	Red
br2	2	747	8000U-050	Red
br3	2	819	8000U-050	Red
br4	2	845	8000U-050	Red
br5	2	609	8000U-050	Red
br6	2	476	8000U-050	Red
br7	2	469	8000U-050	Red
br8	2	515	8000U-050	Red
br9	2	473	8000U-050	Red
br10	2	444	8000U-050	Red
br11	2	257	8000U-050	Red
br12	2	436	8000U-050	Red
BR1	2	1612	8000U-070	Red
BR2	2	1404	8000U-070	Red
BR3	2	1144	8000U-050	Red
BR4	2	1040	8000U-050	Red
BR5	2	686	8000U-050	Red
BR6	2	915	8000U-050	Red
BRI	2	4108	8000U-090	Grey
BRII	2	1924	8000U-070	Red
BRIII	2	2184	8000U-070	Red
		0		
BRMII	2	2496	8000U-090	Grey
Bmain	2	1270	989/1,5	Pink

Line material:

Liros DC 200
 Edelrid 8000U-050
 Edelrid 8000U-070
 Edelrid 8000U-090
 Edelrid 8000U-130
 Edelrid 8000U-230
 Cousin 989/1,5

total length	no. of lines
255050	190

Glider Type: XG57 Trango XC 3 M (LTF/EN C)	Serial No.:
Rev. No.: 4	Date: 12.03.2015

Line lengths [mm]

R. No.	Area A								B								C												
	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	
3	7228										7130												7242						
5	7143										7045												7154						
8	7101										7004												7109						
10	7137										7043												7149						
14	7007										6917												7020						
16	6926										6842												6943						
19	6862										6787												6880						
21	6890										6823												6921						
24	6690										6661												6731						
26	6594										6578												6644						
28	6523										6523												6580						
29	6523										6525												6582						
32	6310										6305												6350						
33	6262																												
34	6264																						6322						

Total line length in cm from riser quick link to canopy including line loops, following DHV measuring method. Line load is 5 daN.

Rib numbering starts in the center of the wing. Wing sides in flight direction, seen from top.

Measurements are rounded to the next 0,5 cm. Please mark measurements relative to nominal by crossing X

R. No.	Area D								Brake								rib no. brakes	Loops on Quick link											
	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	Nom.	-20 mm	-10 mm	0 mm	+10 mm		+20 mm	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	Factory setting	Loop Index	M.T.			
3											7699												3-4	A1	--	0			
5											7436												6-7	A2	--	0			
8											7304												9-10	A3	--	0			
10											7327												12-13	B1	--	0			
14											7148												16-17	B2	--	0			
16											7019												18-19	B3	--	0			
19											6912												21-22	C1	Round turn	1			
21											6955												23-24	C2	Round turn	1			
24											6824												26-27	C3	Round turn	1			
26											6795												28-29	STI	Round turn	1			
28											6835												31						
29											7010												33-34						
32																													
33																													
34																													
												brakes measured inkl. 10cm-loop																	

Single Line Lengths

Glider Type: XG57 Trango XC 3 M (LTF/EN C)
 Rev. No.: 4

Serial No.:
 Date: 12.03.2015

Line no.	Quantity	Length [mm]	material	colour
a1	2	828	8000U-090	Red
a2	2	743	8000U-070	Red
a3	2	751	8000U-070	Red
a4	2	787	8000U-090	Red
a5	2	707	8000U-090	Red
a6	2	626	8000U-070	Red
a7	2	612	8000U-070	Red
a8	2	640	8000U-090	Red
a9	2	540	8000U-070	Red
a10	2	444	8000U-070	Red
a11	2	223	8000U-050	Red
a12	2	223	8000U-050	Red
a13	2	517	8000U-050	Red
a14	2	469	8000U-050	Red
a15	2	471	8000U-050	Red
b1	2	730	8000U-090	Red
b2	2	645	8000U-070	Red
b3	2	654	8000U-070	Red
b4	2	693	8000U-090	Red
b5	2	617	8000U-090	Red
b6	2	542	8000U-070	Red
b7	2	537	8000U-070	Red
b8	2	573	8000U-090	Red
b9	2	511	8000U-070	Red
b10	2	428	8000U-070	Red
b11	2	223	8000U-050	Red
b12	2	225	8000U-050	Red
b13	2	512	8000U-050	Red
c1	2	650	8000U-090	Red
c2	2	562	8000U-070	Red
c3	2	567	8000U-070	Red
c4	2	607	8000U-090	Red
c5	2	528	8000U-090	Red
c6	2	451	8000U-070	Red
c7	2	438	8000U-070	Red
c8	2	479	8000U-090	Red
c9	2	438	8000U-070	Red
c10	2	351	8000U-070	Red
c11	2	207	8000U-050	Red
c12	2	209	8000U-050	Red
c13	2	557	8000U-050	Red
c14	2	529	8000U-050	Red

Line no.	Quantity	Length [mm]	material	colour
A1	2	1600	8000U-130	Red
A2	2	1550	8000U-130	Red
A3	2	1500	8000U-130	Red
A4	2	1450	8000U-130	Red
A5	2	850	8000U-130	Red
A6	2	1000	8000U-070	Red
B1	2	1600	8000U-130	Red
B2	2	1550	8000U-130	Red
B3	2	1500	8000U-130	Red
B4	2	1450	8000U-130	Red
B5	2	850	8000U-130	Red
B6	2	1000	8000U-070	Red
C1	2	1600	8000U-130	Red
C2	2	1550	8000U-130	Red
C3	2	1500	8000U-130	Red
C4	2	1450	8000U-130	Red
C5	2	800	8000U-130	Red
C6	2	880	8000U-070	Red
Amain	2	4800	DC 200	Red
Amain2	2	4800	DC 200	Red
Amain3	2	5300	8000U-130	Red
Bmain	2	4800	DC 200	Red
Bmain2	2	4800	DC 200	Red
Bmain3	2	5300	8000U-130	Red
Cmain	2	5000	8000U-230	Red
Cmain2	2	5000	8000U-230	Red
Cmain3	2	5500	8000U-130	Red
ST1	2	650	8000U-070	Red
ST2	2	650	8000U-070	Red
STI	2	5150	8000U-090	Yellow

Brake no.	Quantity	Length [mm]	material	colour
br1	2	979	8000U-050	Red
br2	2	716	8000U-050	Red
br3	2	784	8000U-050	Red
br4	2	807	8000U-050	Red
br5	2	578	8000U-050	Red
br6	2	449	8000U-050	Red
br7	2	442	8000U-050	Red
br8	2	485	8000U-050	Red
br9	2	444	8000U-050	Red
br10	2	415	8000U-050	Red
br11	2	235	8000U-050	Red
br12	2	410	8000U-050	Red
BR1	2	1550	8000U-070	Red
BR2	2	1350	8000U-070	Red
BR3	2	1100	8000U-050	Red
BR4	2	1000	8000U-050	Red
BR5	2	660	8000U-050	Red
BR6	2	880	8000U-050	Red
BRI	2	3950	8000U-090	Grey
BRII	2	1850	8000U-070	Red
BRIII	2	2100	8000U-070	Red
BRMII	2	2400	8000U-090	Grey
Brmain	2	1220	989/1,5	Pink

Line material:

Liros DC 200
 Edelrid 8000U-050
 Edelrid 8000U-070
 Edelrid 8000U-090
 Edelrid 8000U-130
 Edelrid 8000U-230
 Cousin 989/1,5

total length	no. of lines
244556	190

Glider Type: XG57 Trango XC 3 SM (LTF/EN C)	Serial No.:
Rev. No.: 3	Date: 12.03.2015

Line lengths [mm]

R. No.	Area A							B							C						
	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm		Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm		Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	
3	6947							6855							6964						
5	6865							6773							6878						
8	6824							6732							6835						
10	6858							6769							6872						
14	6732							6644							6747						
16	6653							6569							6672						
19	6590							6515							6612						
21	6617							6551							6653						
24	6431							6404							6475						
26	6339							6324							6395						
28	6269							6270							6332						
29	6269							6272							6338						
32	6064							6059							6102						
33	6018																				
34	6020														6074						

Total line length in cm from riser quick link to canopy including line loops, following DHV measuring method. Line load is 5 daN.

Rib numbering starts in the center of the wing. Wing sides in flight direction, seen from top.

Measurements are rounded to the next 0,5 cm. Please mark measurements relative to nominal by crossing X

R. No.	Area D							Brake							rib no. brakes	Loops on Quick link		
	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm		Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm			Factory setting	Loop Index	MT
3								7389							3-4	A1	--	0
5								7134							6-7	A2	--	0
8								7006							9-10	A3	--	0
10								7027							12-13	B1	--	0
14								6853							16-17	B2	--	0
16								6729							18-19	B3	--	0
19								6624							21-22	C1	Round turn	1
21								6666							23-24	C2	Round turn	1
24								6538							26-27	C3	Round turn	1
26								6511							28-29	STI	Round turn	1
28								6549							31			
29								6718							33-34			
32																		
33																		
34																		

brakes measured inkl. 10cm-loop

Single Line Lengths

Glider Type: XG57 Trango XC 3 SM (LTF/EN C)
 Rev. No.: 3

Serial No.:
 Date: 12.03.2015

Line no.	Quantity	Length [mm]	material	colour
a1	2	803	8000U-090	Red
a2	2	721	8000U-070	Red
a3	2	728	8000U-070	Red
a4	2	762	8000U-090	Red
a5	2	684	8000U-090	Red
a6	2	605	8000U-070	Red
a7	2	590	8000U-070	Red
a8	2	617	8000U-090	Red
a9	2	527	8000U-070	Red
a10	2	435	8000U-070	Red
a11	2	221	8000U-050	Red
a12	2	221	8000U-050	Red
a13	2	503	8000U-050	Red
a14	2	457	8000U-050	Red
a15	2	459	8000U-050	Red
b1	2	711	8000U-090	
b2	2	629	8000U-070	Red
b3	2	636	8000U-070	Red
b4	2	673	8000U-090	Red
b5	2	596	8000U-090	Red
b6	2	521	8000U-070	Red
b7	2	515	8000U-070	Red
b8	2	551	8000U-090	Red
b9	2	500	8000U-070	Red
b10	2	420	8000U-070	Red
b11	2	222	8000U-050	Red
b12	2	224	8000U-050	Red
b13	2	498	8000U-050	Red
c1	2	6964	8000U-090	Red
c2	2	6878	8000U-070	Red
c3	2	6835	8000U-070	Red
c4	2	6872	8000U-090	Red
c5	2	6747	8000U-090	Red
c6	2	6672	8000U-070	Red
c7	2	6612	8000U-070	Red
c8	2	6653	8000U-090	Red
c9	2	6475	8000U-070	Red
c10	2	6395	8000U-070	Red
c11	2	6332	8000U-050	Red
c12	2	6338	8000U-050	Red
c13	2	6102	8000U-050	Red
c14	2	6074	8000U-050	Red

Line no.	Quantity	Length [mm]	material	colour
A1	2	1536	8000U-130	Red
A2	2	1488	8000U-130	Red
A3	2	1440	8000U-130	Red
A4	2	1392	8000U-130	Red
A5	2	816	8000U-130	Red
A6	2	960	8000U-070	Red
B1	2	1536	8000U-130	Red
B2	2	1488	8000U-130	Red
B3	2	1440	8000U-130	Red
B4	2	1392	8000U-130	Red
B5	2	816	8000U-130	Red
B6	2	960	8000U-070	Red
C1	2	1536	8000U-130	Red
C2	2	1488	8000U-130	Red
C3	2	1440	8000U-130	Red
C4	2	1392	8000U-130	Red
C5	2	768	8000U-130	Red
C6	2	845	8000U-070	Red
Amain	2	4608	DC 200	Red
Amain2	2	4608	DC 200	Red
Amain3	2	5088	8000U-130	Red
Bmain	2	4608	DC 200	Red
Bmain2	2	4608	DC 200	Red
Bmain3	2	5088	8000U-130	Red
Cmain	2	4800	8000U-230	Red
Cmain2	2	4800	8000U-230	Red
Cmain3	2	5280	8000U-130	Red
ST1	2	624	8000U-070	Red
ST2	2	624	8000U-070	Red
STI	2	4944	8000U-090	Yellow

Brake no.	Quantity	Length [mm]	material	colour
br1	2	939	8000U-050	Red
br2	2	684	8000U-050	Red
br3	2	748	8000U-050	Red
br4	2	769	8000U-050	Red
br5	2	547	8000U-050	Red
br6	2	423	8000U-050	Red
br7	2	414	8000U-050	Red
br8	2	456	8000U-050	Red
br9	2	415	8000U-050	Red
br10	2	387	8000U-050	Red
br11	2	215	8000U-050	Red
br12	2	384	8000U-050	Red
BR1	2	1488	8000U-070	Red
BR2	2	1296	8000U-070	Red
BR3	2	1056	8000U-050	Red
BR4	2	960	8000U-050	Red
BR5	2	634	8000U-050	Red
BR6	2	845	8000U-050	Red
BRI	2	3792	8000U-090	Grey
BRII	2	1776	8000U-070	Red
BRIII	2	2016	8000U-070	Red
BRMII	2	2304	8000U-090	Grey
Brmain	2	1170	989/1,5	Pink

Line material:

Liros DC 200
 Edelrid 8000U-050
 Edelrid 8000U-070
 Edelrid 8000U-090
 Edelrid 8000U-130
 Edelrid 8000U-230
 Cousin 989/1,5

total length	no. of lines
406218	190

Glider Type: XG57 Trango XC 3 S (LTF/EN C)	Serial No.:
Rev. No.: 2	Date: 12.03.2015

Line lengths [mm]

R. No.	Area A								B								C													
	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	Right -20 mm	Right 0 mm	Right +10 mm	Right +20 mm	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	Right -20 mm	Right 0 mm	Right +10 mm	Right +20 mm	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	Right -20 mm	Right 0 mm	Right +10 mm	Right +20 mm
3	6715									6625											6735									
5	6634									6544											6652									
8	6593									6504											6609									
10	6626									6540											6644									
14	6502									6424											6521									
16	6426									6353											6449									
19	6365									6300											6388									
21	6392									6334											6427									
24	6210									6183											6247									
26	6121									6107											6168									
28	6053									6055											6107									
29	6054									6057											6112									
32	5853									5847											5888									
33	5808																													
34	5811																				5863									

Total line length in cm from riser quick link to canopy including line loops, following DHV measuring method. Line load is 5 daN.

Rib numbering starts in the center of the wing. Wing sides in flight direction, seen from top.

Measurements are rounded to the next 0,5 cm. Please mark measurements relative to nominal by crossing X

R. No.	Area D								Brake								rib no. brakes	Loops on Quick link							
	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm	Right -20 mm	Right 0 mm	Right +10 mm	Right +20 mm	Nom.	-20 mm	-10 mm	0 mm	+10 mm	+20 mm		Right -20 mm	Right 0 mm	Right +10 mm	Right +20 mm	Factory setting	Loop Index	MT	
3										7154											3-4	A1	--	0	
5										6907												6-7	A2	--	0
8										6781												9-10	A3	--	0
10										6801												12-13	B1	--	0
14										6631												16-17	B2	--	0
16										6509												18-19	B3	--	0
19										6407												21-22	C1	Round turn	1
21										6448												23-24	C2	Round turn	1
24										6323												26-27	C3	Round turn	1
26										6296												28-29	STI	Round turn	1
28										6333												31			
29										6498												33-34			
32																									
33																									
34																									
											brakes measured inkl. 10cm-loop														

Single Line Lengths

Glider Type: XG57 Trango XC 3 S (LTF/EN C)
 Rev. No.: 2

Serial No.:
 Date: 12.03.2015

Line no.	Quantity	Length [mm]	material	colour
a1	2	764	8000U-090	Red
a2	2	683	8000U-070	Red
a3	2	689	8000U-070	Red
a4	2	722	8000U-090	Red
a5	2	645	8000U-090	Red
a6	2	568	8000U-070	Red
a7	2	553	8000U-070	Red
a8	2	580	8000U-090	Red
a9	2	492	8000U-070	Red
a10	2	403	8000U-070	Red
a11	2	196	8000U-050	Red
a12	2	196	8000U-050	Red
a13	2	467	8000U-050	Red
a14	2	422	8000U-050	Red
a15	2	426	8000U-050	Red
b1	2	674	8000U-090	Red
b2	2	594	8000U-070	Red
b3	2	600	8000U-070	Red
b4	2	635	8000U-090	Red
b5	2	566	8000U-090	Red
b6	2	495	8000U-070	Red
b7	2	489	8000U-070	Red
b8	2	523	8000U-090	Red
b9	2	465	8000U-070	Red
b10	2	388	8000U-070	Red
b11	2	197	8000U-050	Red
b12	2	200	8000U-050	Red
b13	2	461	8000U-050	Red
c1	2	607	8000U-090	Red
c2	2	523	8000U-070	Red
c3	2	526	8000U-070	Red
c4	2	562	8000U-090	Red
c5	2	486	8000U-090	Red
c6	2	413	8000U-070	Red
c7	2	399	8000U-070	Red
c8	2	438	8000U-090	Red
c9	2	397	8000U-070	Red
c10	2	317	8000U-070	Red
c11	2	181	8000U-050	Red
c12	2	187	8000U-050	Red
c13	2	502	8000U-050	Red
c14	2	477	8000U-050	Red

Line no.	Quantity	Length [mm]	material	colour
A1	2	1488	8000U-130	Red
A2	2	1441	8000U-130	Red
A3	2	1395	8000U-130	Red
A4	2	1348	8000U-130	Red
A5	2	790	8000U-130	Red
A6	2	930	8000U-070	Red
B1	2	1488	8000U-130	Red
B2	2	1441	8000U-130	Red
B3	2	1395	8000U-130	Red
B4	2	1348	8000U-130	Red
B5	2	790	8000U-130	Red
B6	2	930	8000U-070	Red
C1	2	1488	8000U-130	Red
C2	2	1441	8000U-130	Red
C3	2	1395	8000U-130	Red
C4	2	1348	8000U-130	Red
C5	2	744	8000U-130	Red
C6	2	818	8000U-070	Red
Amain	2	4463	DC 200	Red
Amain2	2	4463	DC 200	Red
Amain3	2	4928	8000U-130	Red
Bmain	2	4463	DC 200	Red
Bmain2	2	4463	DC 200	Red
Bmain3	2	4928	8000U-130	Red
Cmain	2	4649	8000U-230	Red
Cmain2	2	4649	8000U-230	Red
Cmain3	2	5114	8000U-130	Red
ST1	2	604	8000U-070	Red
ST2	2	604	8000U-070	Red
STI	2	4788	8000U-090	Yellow

Brake no.	Quantity	Length [mm]	material	colour
br1	2	908	8000U-050	Red
br2	2	661	8000U-050	Red
br3	2	721	8000U-050	Red
br4	2	741	8000U-050	Red
br5	2	524	8000U-050	Red
br6	2	403	8000U-050	Red
br7	2	394	8000U-050	Red
br8	2	434	8000U-050	Red
br9	2	393	8000U-050	Red
br10	2	366	8000U-050	Red
br11	2	199	8000U-050	Red
br12	2	364	8000U-050	Red
BR1	2	1441	8000U-070	Red
BR2	2	1255	8000U-070	Red
BR3	2	1023	8000U-050	Red
BR4	2	930	8000U-050	Red
BR5	2	614	8000U-050	Red
BR6	2	818	8000U-050	Red
BRI	2	3673	8000U-090	Grey
BRII	2	1720	8000U-070	Red
BRIII	2	1953	8000U-070	Red
BRMII	2	2232	8000U-090	Grey
Brmain	2	1132	989/1,5	Pink

Line material:

Liros DC 200
 Edelrid 8000U-050
 Edelrid 8000U-070
 Edelrid 8000U-090
 Edelrid 8000U-130
 Edelrid 8000U-230
 Cousin 989/1,5

total length	no. of lines
226282	190

Service booklet

Glider- and pilot data

Model:	Trango XC³
Size:	<input type="checkbox"/> XS <input type="checkbox"/> S <input type="checkbox"/> M <input type="checkbox"/> L
Serial number:	_____
Colour:	_____
Date of purchase:	_____
First flight date:	_____
Dealer stamp and signature	

Pilot (1. owner)
Name: _____
Family name: _____
Street: _____
Town: _____
Postal code: _____
Country: _____
Telephone: _____
Fax: _____
Email: _____

Pilot (2. owner)

Name: _____

Family name: _____

Street: _____

Town: _____

Postal code: _____

Country: _____

Telephone: _____

Fax: _____

Email: _____

Pilot (3. owner)

Name: _____

Family name: _____

Street: _____

Town: _____

Postal code: _____

Country: _____

Telephone: _____

Fax: _____

Email: _____

Please verify that your UP Service Centre has correctly filled in the form!

1st Service

Performed date: _____

Assignment Nr.
Stamp

Service jobs undertaken:

2nd Service

Performed date: _____

Assignment Nr.
Stamp

Service jobs undertaken:

3rd Service

Performed date: _____

Assignment Nr.
Stamp

Service jobs undertaken:

Please verify that your UP Service Centre has correctly filled in the form!

4th Service

Performed date: _____

Assignment Nr.
Stamp

Service jobs undertaken:

5th Service

Performed date: _____

Assignment Nr.
Stamp

Service jobs undertaken:

6th Service

Performed date: _____

Assignment Nr.
Stamp

Service jobs undertaken:

Product registration card

Model: Trango XC³

Size: S SM M L

Serial number: _____

Date of purchase: _____

First flight: _____

Preflowed by: _____

Owner

Name: _____

Family name: _____

Address: _____


Telephone: _____

Fax: _____

Email: _____

Dealer stamp and signature

Cut out this card and mail it to UP within 14 days of purchase, or register your new UP Trango XC³ via www.up-paragliders.com>Service>UP>Product Registration



UP International GmbH
Kreuzeckbahnstrasse 7
82467 Garmisch-Partenkirchen
GERMANY

